



ENCLOSED COMO / COFFRET COMO / COMO EN CAJA / GEHÄUSE COMO





25 A (3-4P) / 32 A (3-4P)
Blue handle / grey cover
Red handle / yellow cover




32 A (6-8P) / 63 A (3-4P) - 100 A (3-4P)
Blue handle / grey cover
Red handle / yellow cover






63 A (6-8P) / 125 A (3-4P)
Blue or red handle / grey cover

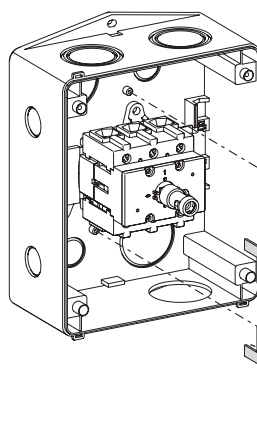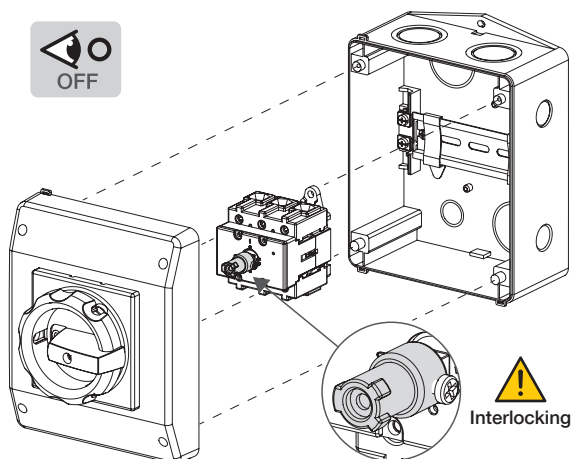



Product size	Size 1	Size 2	Size 3
EMC Shield reference	21103301	21103302	21103303
	8 - 11 mm 0.31 - 0.43 in	12 - 16 mm 0.47 - 0.63 in	23 - 29 mm 0.91 - 1.14 in
	PH0 0.2 Nm	PH1 0.5 Nm	PH2 1.4 Nm



	A	B
Size 1	M25	M20
Size 2	M32/40	M20
Size 3	M50/63	M20

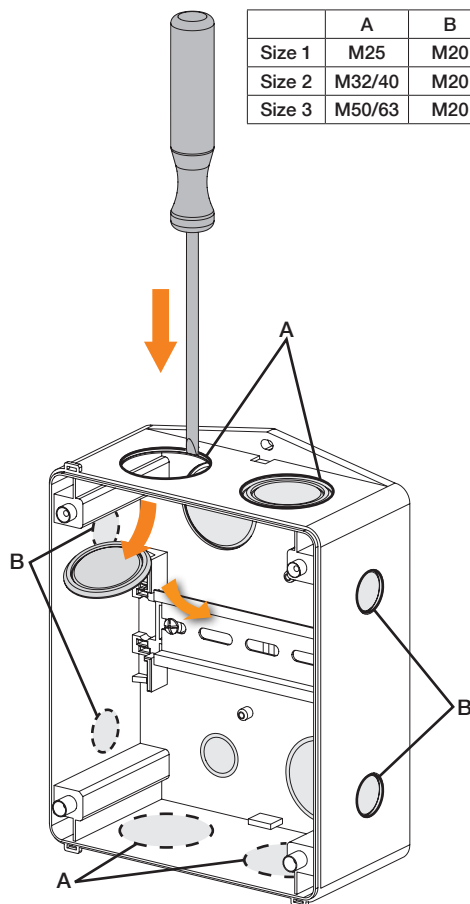


Pozidriv 2
Max. 1.5Nm



Flat

**HANDLE PADLOCKING
CADENASSAGE DE LA POIGNÉE
PADLOCKING DEL MANGO
GRIFFVERBIEGELUNG**




- Up to 3 padlocks Ø 8 mm
- Jusqu'à 3 cadenas Ø 8 mm
- Hasta tres candados Ø 8 mm
- Bis zu drei Schlössern Ø 8 mm




**Do not drill the back of the enclosure.
Ne pas perçer à l'arrière du coffret.
No perforar en la parte posterior de la caja.
Die Rückseite des Gehäuse nicht bohren.**

[illegible]

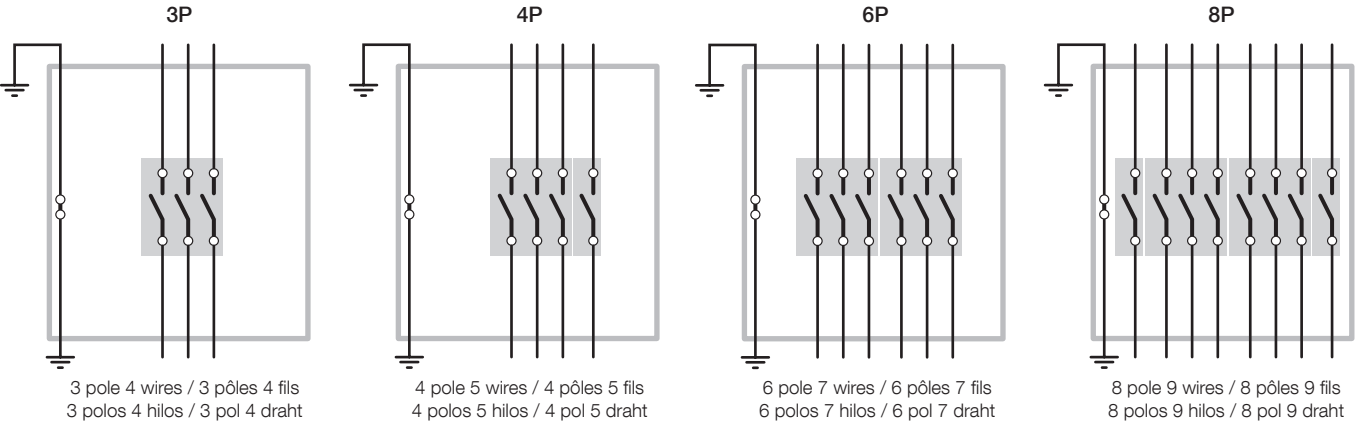

ADDITIONAL SOLID NEUTRAL POLE & AUXILIARY CONTACT / PÔLE NEUTRE PASSANT ET CONTACT AUXILAIRE ADDITIONNELS
POLO ADICIONAL PARA NEUTRO PASANTE & POLO AUXILIAR / BELEBTER NEUTRALER POL UND KONTAKT DIE ZUSÄTZLICHEN AUXLIAIRES

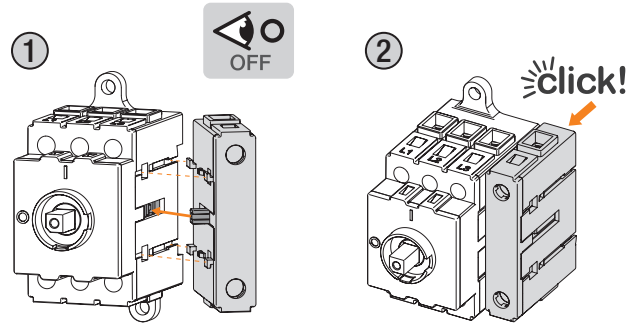

Configurations / Configurations
Configuraciones / Konfigurationen

3P / 4P 6P / 8P AUX AUX N Solid Neutral

ALLOWED

AUX AUX N AUX N


Connection for auxiliary contact
Raccordement pour contact auxiliaire
Conexión del contacto auxiliar
Verbindung für Hilfskontakt

Min. cable section Cu (mm²)	0.75
Max. cable section Cu (mm²)	2.5
Stripping distance (mm)	8.0
Type of screwdriver	PZ2
Tightening torque min (Nm)	0.8
Tightening torque max (Nm)	1.2


⚠ Dismounting of auxiliary contacts will destroy them. Le démontage des contacts auxiliaires entraînera leur casse.
El desmontaje del contacto auxiliar provocaría su destrucción. Der Hilfskontakte demontage wird ihren schaden fortziehen.

DIMENSIONS / DIMENSIONES / DIMENSIONEN (mm)

Size 1

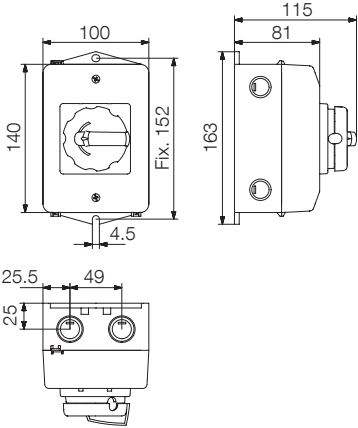

Size 2

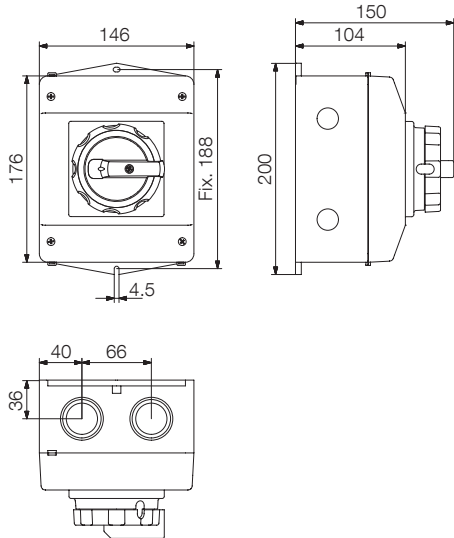

Size 3

