


36299025

Fuse combination switches Solid Neutral Link BS 250A 415 VAC

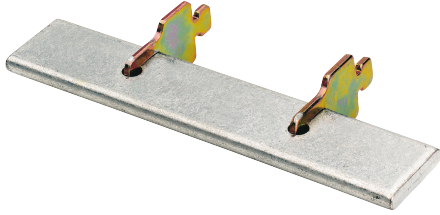

Solid link to be used in conjunction with fuse bases or knife-edge fused disconnecting switches, generally fitted on the neutral pole.

Access to resources (ex: manuals)



<https://www.socomec.co.uk/en-gb/reference/36299025>

Technical Characteristics

Weight [kg]	0.099
Fuse melting indicator	without striker
Rated voltage	415 VAC
Rated current [A]	250
Type	B1-B3

Classification

UNSPSC	39122233
ETIM Class	EC000026
IGCC	5291

Commerce

Effective date	1991-07-08
Offer Life Cycle Code	40
Country of origin	FR

Logistics

GTIN/EAN	3596031182145
Customs number	8538909999
Price unit	PC
Weight of the packing unit [kg]	0.099
Length of the packing unit [m]	0.003
Width of the packing unit [m]	0.02
Depth of the packing unit [m]	0.135

Norms

Conformity to standards	IEC
-------------------------	-----