


**41090021**

## 1st/2nd auxiliary contact pre-break N position NO/NC SIRCOVER 125-1600A

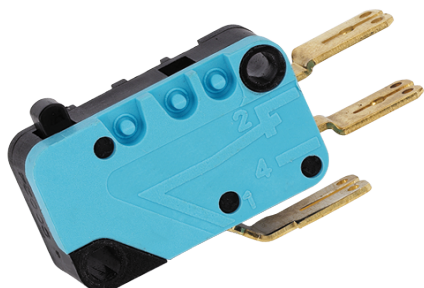

### General characteristics

- Up to 2 NO/NC auxiliary contacts (1 fitted as standard).
- Connection to the control circuit by 6.35 mm fast-on terminal.
- Electrical characteristics : 30,000 operations.
- Low level AC: contact us.

### Access to resources (ex: manuals)



<https://www.socomec.co.uk/en-gb/reference/41090021>

Pre-breaking and signalling of positions I and II: 1 to 2 NO/NC auxiliary contacts in each position.

### Technical Characteristics

Weight [kg]	0.02
Number change-over contacts	1
Number NC contacts	1
Number NO contacts	1
Type	Pre-break auxiliary contact 1st or 2nd NO/NC for SIRCOVER 125A-1600A

### Classification

UNSPSC	39122205
ETIM Class	EC000041
IGCC	5177

### Commerce

Effective date	1997-04-16
Offer Life Cycle Code	40
Country of origin	CN

### ETIM - Electrical characteristics

Number of contacts as normally open contact	2
Number of contacts as normally closed contact	2
Rated operation current Ie at AC-15, 230 V [A]	12

### ETIM - Mechanical characteristics

Type of electric connection	Flat plug-in connection
Mounting method	Front fastening

### ETIM - Technical features

Model	Integrable
Lamp holder	None

### Logistics

GTIN/EAN	3596031205554
Customs number	8536500700
Price unit	PC
Weight of the packing unit [kg]	0.02
Length of the packing unit [m]	0.015
Width of the packing unit [m]	0.102
Depth of the packing unit [m]	0.119

### Norms

Conformity to standards	IEC
-------------------------	-----