


60120004

gG curves without striker NFC Fuselink gG 4A 500 VAC

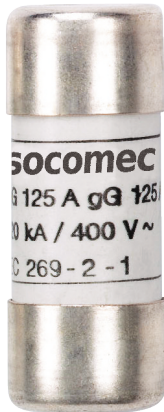

SOCOMEC industrial fuses protect installations and people from overcurrents for any low voltage electrical circuit.

Strong points

- High-performance
- Increased reliability
- Improved safety

Compliance with standards

- IEC 60269-1
- DIN EN 60269-1
- NF EN 60269-1
- IEC 60269-2
- NF EN 60269-2

Access to resources (ex: manuals)



<https://www.socomec.co.uk/en-gb/reference/60120004>

Technical Characteristics

Height [mm]	38
Width [mm]	10.3
Weight [kg]	0.01
Fuse melting indicator	without striker
Fuse size	10x38
Rated voltage	500 VAC
Rated current [A]	4
Type	gG

Classification

UNSPSC	39121609
ETIM Class	EC002704
IGCC	4905

Commerce

Effective date	1988-04-15
Offer Life Cycle Code	40
Country of origin	ES

ETIM - Electrical characteristics

Rated current [A]	4
Rated voltage AC [V]	500
Voltage type	AC
Utilization category according to IEC 60269	gG
Rated operating frequency [Hz]	50..60
Breaking capacity at nominal voltage, AC [kA]	120
Power loss at rated current [W]	0.7

ETIM - Mechanical characteristics

Size	10x38 mm
------	----------

ETIM - Technical features

Model	Ceramic fuse
-------	--------------

Logistics

GTIN/EAN	3596031377084
Customs number	8536101090
Price unit	PC
Weight of the packing unit [kg]	0.01
Length of the packing unit [m]	0.01
Width of the packing unit [m]	0.01
Depth of the packing unit [m]	0.04

Norms

Conformity to standards	IEC
-------------------------	-----