


64210002

NFC/DIN industrial fuses DIN Solid Link 400A 415 VAC

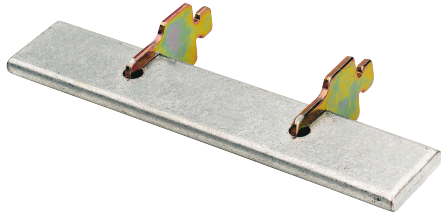

Solid link to be used in conjunction with fuse bases or knife-edge fused disconnecting switches, generally fitted on the neutral pole.

General characteristics

- 6 sizes: 000/00C/00-0-1-2-3-4.

Access to resources (ex: manuals)



<https://www.socomec.co.uk/en-gb/reference/64210002>

Technical Characteristics

Height [mm]	61
Width [mm]	152.5
Depth [mm]	60
Weight [kg]	0.25
Fuse melting indicator	without striker
Rated voltage	415 VAC
Rated current [A]	400
Type	NH2

Classification

UNSPSC	39121612
ETIM Class	EC000026
IGCC	4908

Commerce

Effective date	1988-04-15
Offer Life Cycle Code	40
Country of origin	FR

ETIM - Electrical characteristics

Rated current [A]	400
-------------------	-----

ETIM - Mechanical characteristics

Construction size	NH2
-------------------	-----

Logistics

GTIN/EAN	3596031381500
Customs number	8538909999
Price unit	PC
Weight of the packing unit [kg]	0.25
Length of the packing unit [m]	0.15
Width of the packing unit [m]	0.06
Depth of the packing unit [m]	0.025

Norms

Conformity to standards	IEC
-------------------------	-----