

# Selection guide

## Current transformers

Type	TRB 60	TRB 70	TRB 135	TCA 14	TCA 21	TCA 22	TCB 17-20	TCB 26-30	TCB 28-30	TCB 26-40	TCB 32-40	TCB 44-50
Format	Wound primary			Cable			Cable – busbar					
Class	0.5	0.5	0.5	1	0.5/1	1	1	0.5/1	0.5/1	1	0.5/1	0.5/1
Version 0.2s			(1)			(2)		T2CB 26-30			T2CB 32-40	
	p. 2			p. 2			p. 2					

### Rating (A)

0.5												
5	5											
10	...											
10	10											
15		5										
20		...										
20		40										
25												
30												
40												
50												
60												
75												
80												
100												
125												
150												
160												
200												
250												
300												
400												
500												
600												
750												
800												
1000												
1200												
1250												
1500												
1600												
2000												
2500												
3000												
4000												
5000												

### Dimensions


Height	75.5	85.5	85	65	65	65	65	61	70	75.5	88.5	98.5	
Width	61	71	135	45	45	49.5	49.5	75.5	49.9	61	71	86	
Depth	35	45	60	30	30	35	50	48	68	48	58	58	
Cable (Ø mm)				14	21	22.5	17.5	26	28	26	32	44	
Busbar 1								20x5	30x10	30x10	32x18	40x10	50x12
Busbar 2									20x10 (x2)		40x12	30x5 (x2)	40x10 (x2)
Busbar 3													

\* Class 1.

(1) See T2RB 115 for a 0.2S wound primary version. Dimensions differ from TRB 135.

(2) See T2CA 225 for a 0.2S closed-loop cable version. Dimensions differ from TCA 22.

TCB 44-63	TCB 55-80	TCD 85-100	TCB 100-125	TBA 60	TBA 80	TBA 100	TBA 103	TBA 127	TO 23	TO 58	TO 812	TO 816
Cable – busbar				Busbar					Split-core			
0.5	0.5	0.5	0.5	0.5/1	0.5	0.5	0.5	0.5	1/3	0.5/1	0.5/1	0.5
T2CB 44-63						T2BA 100	T2BA 103	T2BA 127				
p. 2				p. 2					p. 2			

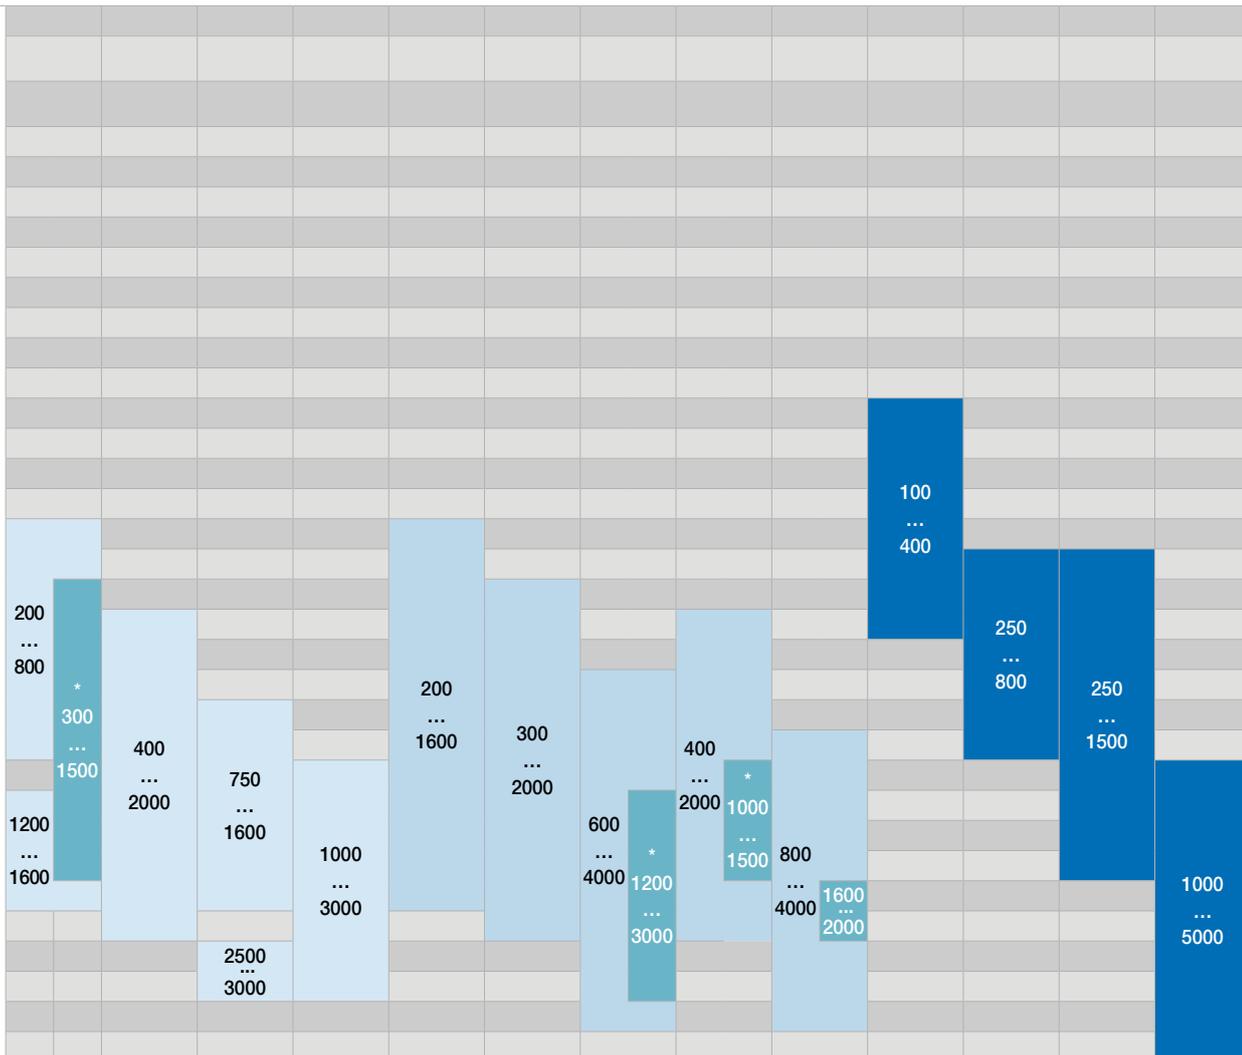

105.5	123.5	184.8	184.8	129	117	167	150	175	106	158	198	243
96	120	172	172	88	96	129	99	100	93	125	155	195
58	58	52	52	48	68	78	58	55	58	58	58	79
44	55	85	100									
63x10	80x10	100x10	123x30	60x30	84x34	100x55	103x41	128x38	33x23	85x55	125x85	165x85
50x10 (x2)	60x30	80x10 (x3)	100x10 (x3)									
	60x10 (x2)											