

STATYS XS

16 A / 32 A



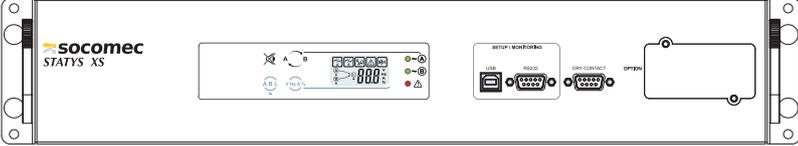
SUPERIOR

Unrivalled power
performance

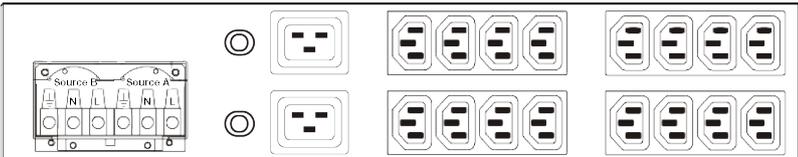


Socomec Resource Center
To download, brochures, catalogues
and technical manuals

DIMENSIONS

	Model	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
	16 A	440 (19")	285	44 (1U)	4
	32 A		360	88 (2U)	6

CONNECTIONS

	Model	INPUT	OUTPUT
	16 A	2x IEC C20 (16 A)	1x IEC C19 (16 A) 8x IEC C13 (10 A)
	32 A	Terminal 1 x 6P (10 mm ²)	2x IEC C19 (16 A) 16x IEC C13 (10 A)

ELECTRICAL CHARACTERISTICS	16 A	32 A
Rated mains supply voltage	200 / 208 / 220 / 230 / 240 V	
Input voltage range	150 Vac to 300 Vac	
RMS voltage tolerance	+/-10% (configurable +/-5% to +/-20%)	
Rated Frequency	50 / 60 Hz	
Frequency tolerance	+/-10% (configurable +/-5% to +/-20%)	
Transfer time	ITIC compliant	
Admitted overload	125% / 1 minutes, 150% / 30 seconds	

COMMUNICATION AND OPTIONS	16 A	32 A
Display	LCD + Display	
Standard communication features	Slot for optional communication board	
	5 dry contacts (Volt free) - Configurable	
	Setting port for configuration tool	
Options	SNMP communication board	
	RS485 Communication board	

ELECTRICAL CHARACTERISTICS - ENVIRONMENT	16 A	32 A
Storage conditions	-5 to 40 °C @ 0 to 90% RH (non-condensing)	
Working temperature	-5 to +40 °C	
Working relative humidity	0 - 90% (non-condensing)	
Noise	< 25 dBA	
Conformity	CE compliant	
Directives	2014/35/UE ; 2014/30/UE	
Standards	IEC60950-1 ; CEI/EN 62310-2	
Environmental	WEEE ; ROHS	

