






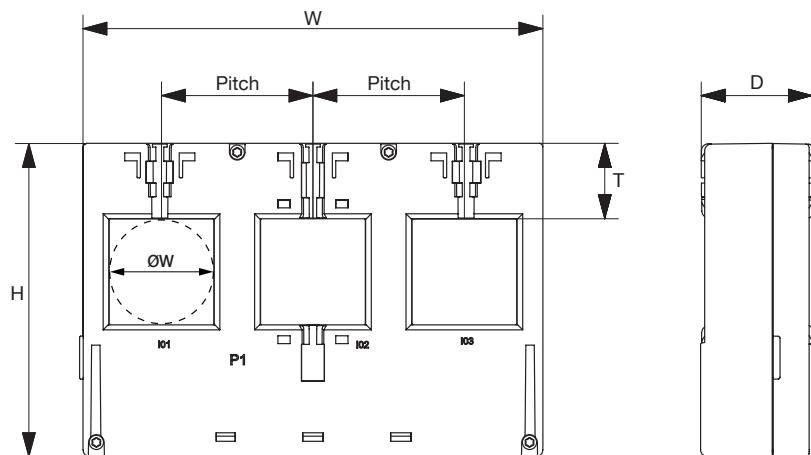


Dimensions

	W		H		D		T		ØW		Pitch	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
QCT-C-25	75	2.95	71	2.80	32,8	1.29	17,5	0.69	13,5	0.53	24.8	0.98
QCT-C-35	105	4.13	78	3.07	32,8	1.29	17,5	0.69	21	0.83	35	1.38
QCT-C-45	135	5.31	92	3.62	32,8	1.29	19,5	0.77	31	1.22	45	1.77
QCT-C-55	165	6.50	106	4.17	32,8	1.29	21,5	0.85	41	1.61	55	2.17

QCT-C-xx 3-phase CT blocks

Model	QCT-C-25	QCT-C-35	QCT-C-45	QCT-C-55
Nominal current range I _n (A)	40 ... 160	63 ... 250	160 ... 630	400 ... 1000
Real range covered (A)	0.8 ... 192	1.26 ... 300	3.2 ... 756	8 ... 1200
Max. current<30min (A)	192	300	756	1200
Max. continuous thermal current (A)	192	300	630	1000
Weight (g)	150	200	350	500
Max. voltage	600 V P/N & 690 V P/P			
Rated withstand voltage	3 kV / 1min	3,6 kV / 1min		
Frequency	50/60 Hz			
Intermittent overload	10 x I _n over 1 sec			
Measurement category	CAT III			
Protection degree	IP30 / IK06			
Operating temperature	-10 ... +70°C			
Storage temperature	-25 ... +85°C			
Relative humidity	95% RH non-condensing			
Altitude	< 2000 m			
Connection	Socomec RJ12 cable			
Measurement category	Indoor use & Pollution Degree 2			

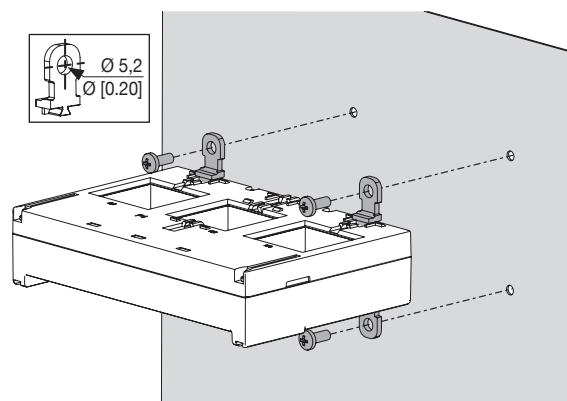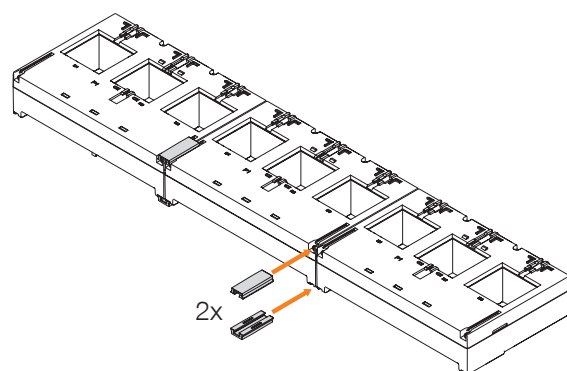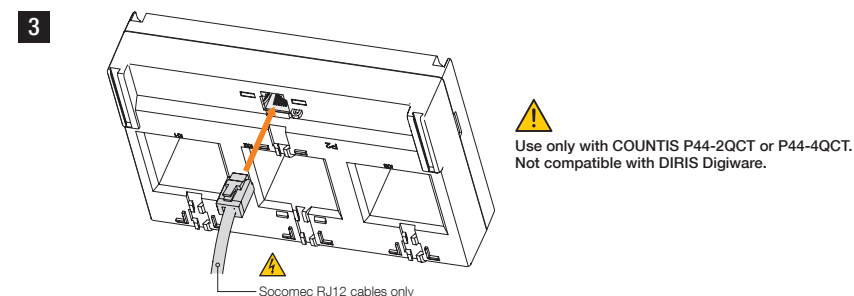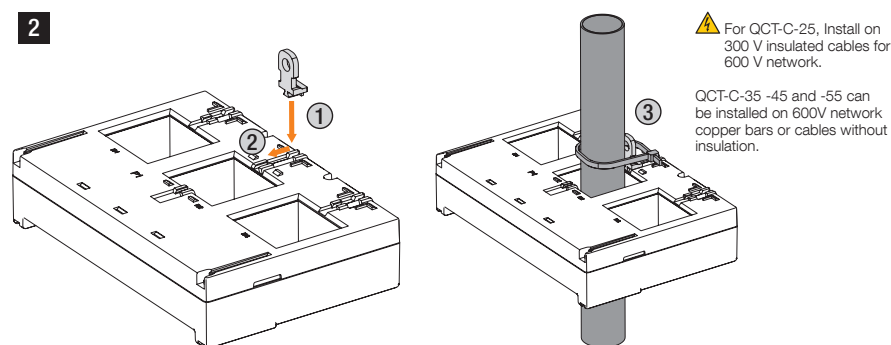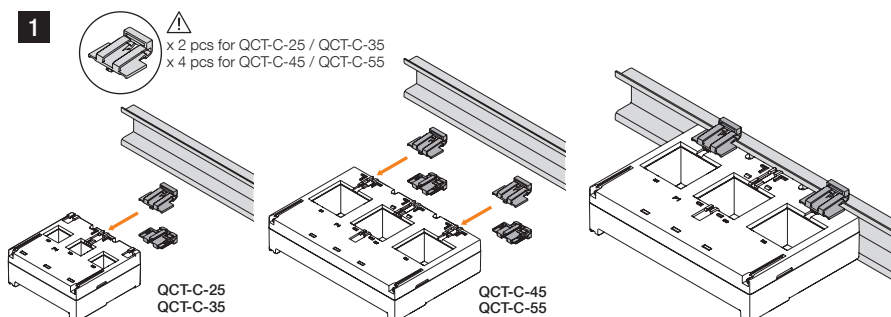

A+B or A+C

