


57025006

RM cylind. fuse holder without sign. aux. cont.-50A-4P-NFC-Fuse 14x51

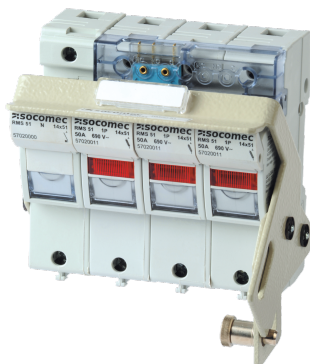

Strong points

- Improved safety
- High breaking capacity
- Format and specific accessories

General characteristics

- Improved safety.
- High breaking capacity.
- Features and options.

Compliance with standards

- IEC 60269-2,-1
- IEC 60269-1
- IEC 60269-2
- UL E307648

Access to resources (ex: manuals)

RMs are modular fuse disconnect switches for cylindrical fuses. They ensure safe disconnection and protection against surges and short-circuits in any low voltage electrical circuit.

Classification

UNSPSC	39121624
ETIM Class	EC002705
IGCC	4974

Commerce

Effective date	2012-06-25
Country of origin	ES
Length of the product unit	0.11
Width of the product unit	0.106
Depth of the product unit	0.076
Weight	0.47

ETIM - Electrical characteristics

Nominal voltage [V]	690
Number of poles	4
Concurrently switching neutral conductor	No

ETIM - Mechanical characteristics

Mounting method	DIN rail
For fuse size	14x51 mm

ETIM - Technical features

With optical defect indication	No
--------------------------------	----

Logistics

GTIN/EAN	3596032687038
Customs number	8536105090
Price unit	PC
Weight of the packing unit	0.47
Length of the packing unit	0.12
Width of the packing unit	0.13
Depth of the packing unit	0.09

Norms

Conformity to standards	IEC UL
-------------------------	------------

Technical Characteristics

Fuse melting indicator	no
Fuse size	14x51
Number of poles	4
Rated current	50
Size	RM/RMS 50

<https://www.socomec.co.uk/en-gb/reference/57025006>