

MASTERYS EM+

Uninterruptible Power Supply from 80 to 120kVA



Socomec is member of :





Environment and sustainable development commissions





The commitments of Socomec to respect the environment

As part of its environmental policy, Socomec is committed to:

- Develop innovating solutions primarily focused on energy efficiency to help its customer in the design of less energyconsuming, better managed and ecofriendly installations.
- Diversify its product offer in the renewable energy and energy efficiency sectors,
- Minimize the environmental impact of its industrial activities through the progressive ISO 14001 certification of its production sites,
- Minimize at the preliminary design stage the environmental impacts of its products taking into account their whole life cycle,
- Provide his customers with reliable data on the environmental performance of the products.







Representative product

Reference product

The representative product is the MASTERYS EM+ 80kVA with commercial reference U4EM083M00-0200 .

Input dependency characteristics	Configuration	Power kVA/kW	Dimensions	Acoustic noise	Power factor
VFI-SS-111	online double conversion	80/72	600 x 855 x 1400 mm	≪60dBA	0,9

Other product covered : MASTERYS EM+ 120kVA with commercial reference U4EM123M00-0200

Input dependency characteristics	Configuration	Power kVA/kW	Dimensions	Acoustic noise	Power factor
VFI-SS-111	online double conversion	120/108	600 x 855 x 1400 mm	≪60dBA	0,9

Functional unit

MASTERYS EM+ 80kVA: To protect the load of 80 kVA against input power failure during 15 years and provide a backup time ranging from a few minutes to a few hours in case of a power outage.

MASTERYS EM+ 120kVA : To protect the load of 120 kVA against input power failure during 15 years and provide a backup time ranging from a few minutes to a few hours in case of a power outage.

Material and substances

Declaration of the constitutive materials according to IEC 62474

MASTERYS EM+ 80kVA

Total mass of the reference product (including packaging): 207kg

Total mass of packaging: 28,12kg. The packaging is composed of carton, paper, film packaging and a wooden pallet

Metals, 76.1% weight		Plastics, 8.7% weight		Others, 15.2% weight	
Other Ferrous alloys, non- stainless steels	54,4%	Others thermoplastics	6,5%	Others Organics	13,6%
Aluminium and its alloys	11,6%	Other plastics	2,2%	Other Inorganics	0,6%
Copper and its alloys	9,9%			Ceramics and Glass	1,0%
Zinc and its alloys	0,1%				
Other non-ferrous metals and alloys	0,1%				
Precious metals	< 0,1%				
Nickel and its alloys	< 0,1%				
Stainless steel	< 0,1%				

The estimated content of recycled materials is 24,3%, based on a Life Cycle Analysis with EIME software which is a software distributed by LCIE, a subsidiary of Bureau Veritas.

MASTERYS EM+ 120kVA

Total mass of the reference product (including packaging): 266kg

Fotal mass of packaging: 28,14kg . Th	ne packaging is composed of cart	ton, paper, film packaging and	a wooden pallet

Metals, 78,4% weight	Plastics, 8,6% weight	Others, 13% weight
----------------------	-----------------------	--------------------

The estimated content of recycled materials is 24,0%, based on a Life Cycle Analysis with EIME software which is a software distributed by LCIE, a subsidiary of Bureau Veritas.



Substances management

Socomec is leading a program to limit the use of hazardous substances in the design of new products and to monitor the presence of substances of concern in its supplies to anticipate future use restrictions.



Directive 2011/65/EU : Product references covered by this PEP meet the requirements of the RoHS Directive on the restriction of substances such as lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyl (PBB), polybrominated diphenyl ethers (PBDEs) and phthalates (DIBP, DEHP, BBP, DBP).



To the best of our knowledge, based on the supplier declarations, at the publication date of this document, the product do not contain any SVHC in a concentration above 0,1% per weight

Manufacturing



The products covered by this PEP are manufactured on the production site whose environmental management system has been ISO 14001 certified. Impacts on the environment are reduced by optimizing its energy consumption and by practicing a rigorous waste management.

Distribution

As part of its distribution policy aiming to respect the environment, Socomec is in favor of groupage transports and ISO14001 certified logistic partners.

Installation

The installation stage consists in connecting the product to the existing electrical installation. The installation does not generate any significant impacts on the environment, except impacts from packaging waste.

Use phase

Electrical consumption

Use phase scenario: European energy mix

Load (%)	25%	50%	75%	100%
Proportion of time spent (%)	25%	50%	25%	0%





Total energy consumption during 15 years

MASTERYS EM+ 80kVA

Total average energy consumption	208 926 kWh	
Average UPS efficiency	Up to 96,0%	

MASTERYS EM+ 120kVA

Total average energy consumption	319 302 kWh
Average UPS efficiency	Up to 95,9%

Care and maintenance

It is recommended to carry out periodic specialized maintenance in order to keep the equipment at the maximum level of efficiency and to avoid the installation being out of service with possible damage/risks Typical parts which are subject to maintenance:

Components	Fans	Capacitors
Number of replacements	3	2

Consumables

The product does not require consumables.

End of life

Recovery potential of the product according to IEC TR 62635


The total potential value of the products covered is **84,5%**. This potential value takes into account the material recycling and energy recovery

Note: Maintenance and disassembly should always be conducted by qualified personnel.

End of life treatment

The following parts require specific care and selective treatment in accordance with Annex VII of the WEEE Directive 2012/19/EU - Waste of electrical and electronic equipment.



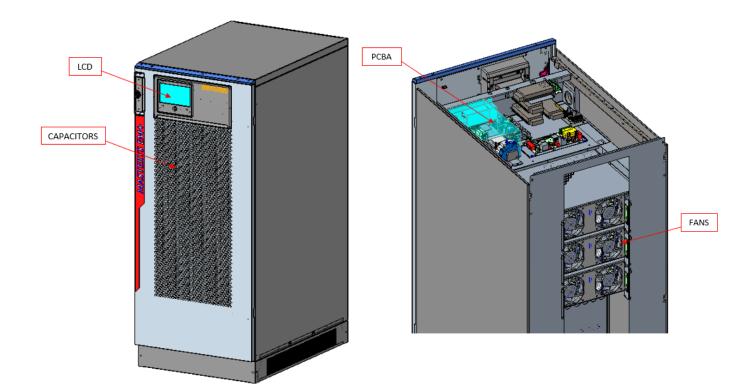

Potential Security hazard for operators	Necessity of a selective treatment
LCD screen	LCD screen
Capacitors	Capacitors
	PCBA
	Fans



Additional information



This environmental declaration lists the information required in the Annex A and B (substances: criterion 1) of IEC 62040-4 (Edition 1.0 2013-04) and EN 62040-4:2013 (2014-03).

Environmental impacts

Calculation methodology: life cycle assessment (LCA)



The calculation of the impacts on the environment was made using a life cycle assessment methodology in accordance with the ISO 14040 requirements and with PEP eco passport product category rules. For more details follow the link: <u>www.pep-ecopassport.org</u> This study was carried out with the version 5.9.3 of the software EIME with version database CODDE_2016_11. The software is distributed by CODDE which is a subsidiary of Bureau Veritas.

This product follows the rules defined in the PSR-0010-ed1.1-EN-2015 10 16

The whole life cycle has been taken into account:

Step	Geographical representativeness	Scenario
Manufacturing (M)	Production of electronic components : Europe Production of other components and packaging : Europe Assembly : Italy Last logistic platform Italy	From the raw material extraction to the last Socomec logistic platform, including packaging Waste generated during manufacturing phase are taken into account.
Distribution (D)	Distribution scenario : Europe	From the last Socomec logistic platform to the final customer. No product reconditioning.
Installation (I)	Transport and treatment of packaging wastes : Local	Local road transport of generated wastes to the treatment site, and landfilling
Use phase (U)	Energy mix : Europe Production of maintenance components : analog to manufacturing phase	Power consumption required during 15 years and maintenance scenario according to consumption scenario described above.
End Of Life (EOL)	Transport and treatment : Local	Road transport of 1000 km from the final customer to the treatment sites. End of life treatment.



Environmental impacts

The following impacts have been calculated to best represent geographically and technologically each step of the life cycle. **Indicators**

MASTERYS EM+ 80kVA

Indicators	Unit	Total impact	М	D	I	U	EOL
Contribution to global warming	kg CO ₂ eq.	1,04E+05	9,15E+02	1,08E+02	0*	1,03E+05	4,08E+01
Contribution to ozone layer depletion	kg CFC-11 eq.	6,81E-03	1,01E-04	0*	0*	6,71E-03	0*
Contribution to the soil and water acidification	kg SO₂ eq.	4,33E+02	4,21E+00	4,86E-01	0*	4,28E+02	1,68E-01
Contribution to water eutrophication	kg (PO ₄) ³⁻ eq.	2,67E+01	5,46E-01	1,12E-01	1,75E-02	2,59E+01	1,16E-01
Contribution to photochemical ozone formation	kg C_2H_4 eq.	2,39E+01	3,51E-01	3,45E-02	0*	2,35E+01	1,25E-02
Contribution to the depletion of abiotic resources - elements	kg Sb eq.	1,08E-01	8,40E-02	0*	0*	2,42E-02	0*
Contribution to the depletion of abiotic resources - fossil fuels	MJ	1,17E+06	7,97E+03	1,52E+03	0*	1,16E+06	4,77E+02
Contribution to water pollution	m³	4,35E+06	8,30E+04	1,78E+04	8,41E+02	4,25E+06	5,56E+03
Contribution to air pollution	m³	4,66E+06	2,01E+05	4,43E+03	5,15E+02	4,45E+06	3,40E+03
Use of renewable primary energy (excl. raw materials)	MJ	2,60E+05	2,12E+02	0*	0*	2,60E+05	0*
Use of renewable primary energy used as raw materials	MJ	5,90E+02	5,74E+02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2,61E+05	7,86E+02	0*	0*	2,60E+05	0*
Use of non-renewable primary energy (excl. raw materials)	MJ	1,82E+06	3,04E+04	1,53E+03	0*	1,79E+06	4,98E+02
Use of non-renewable primary energy used as raw materials	MJ	1,09E+03	6,56E+02	0*	0*	0*	0*
Total use of non-renewable primary energy resources	MJ	1,82E+06	3,11E+04	1,53E+03	0*	1,79E+06	4,98E+02
Use of secondary materials	kg	6,63E+01	5,91E+01	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*
Use of non-renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*
Net use of fresh water	m³	3,71E+05	0*	0*	0*	3,71E+05	0*
Hazardous waste disposed of	kg	3,15E+03	2,45E+03	0*	0*	6,99E+02	0*
Non-hazardous waste disposed of	kg	3,83E+05	6,53E+02	0*	0*	3,82E+05	2,08E+02
Radioactive waste disposed of	kg	2,56E+02	6,33E-01	0*	0*	2,55E+02	0*
Components for reuse	kg	0*	0*	0*	0*	0*	0*
Materials for recycling	kg	0*	0*	0*	0*	0*	0*
Materials for energy recovery	kg	0*	0*	0*	0*	0*	0*
Exported energy	MJ by energy vector	0*	0*	0*	0*	0*	0*
Total use of primary energy during the life cycle	MJ	2,08E+06	3,19E+04	1,53E+03	0*	2,05E+06	5,05E+02



MASTERYS EM+ 120kVA

Indicators	Unit	Total impact	М	D	I	U	EOL
Contribution to global warming	kg CO ₂ eq.	1,58E+05	1,18E+03	1,39E+02	0*	1,57E+05	5,22E+01
Contribution to ozone layer depletion	kg CFC-11 eq.	1,04E-02	1,41E-04	0*	0*	1,02E-02	0*
Contribution to the soil and water acidification	kg SO₂ eq.	6,60E+02	5,41E+00	6,25E-01	0*	6,54E+02	2,15E-01
Contribution to water eutrophication	kg (PO ₄) ³⁻ eq.	4,05E+01	6,89E-01	1,44E-01	1,75E-02	3,95E+01	1,48E-01
Contribution to photochemical ozone formation	kg C_2H_4 eq.	3,65E+01	4,48E-01	4,44E-02	0*	3,59E+01	1,60E-02
Contribution to the depletion of abiotic resources - elements	kg Sb eq.	1,50E-01	1,21E-01	0*	0*	2,89E-02	0*
Contribution to the depletion of abiotic resources - fossil fuels	MJ	1,79E+06	1,02E+04	1,95E+03	0*	1,78E+06	6,10E+02
Contribution to water pollution	m³	6,62E+06	1,10E+05	2,29E+04	8,42E+02	6,48E+06	7,12E+03
Contribution to air pollution	m³	7,08E+06	2,92E+05	5,70E+03	0*	6,78E+06	4,36E+03
Use of renewable primary energy (excl. raw materials)	MJ	3,98E+05	3,58E+02	0*	0*	3,98E+05	0*
Use of renewable primary energy used as raw materials	MJ	5,78E+02	5,62E+02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3,98E+05	9,20E+02	0*	0*	3,98E+05	0*
Use of non-renewable primary energy (excl. raw materials)	MJ	2,77E+06	3,63E+04	1,96E+03	0*	2,73E+06	6,38E+02
Use of non-renewable primary energy used as raw materials	MJ	1,31E+03	8,81E+02	0*	0*	0*	0*
Total use of non-renewable primary energy resources	MJ	2,77E+06	3,72E+04	1,96E+03	0*	2,73E+06	6,38E+02
Use of secondary materials	kg	8,00E+01	7,28E+01	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*
Use of non-renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*
Net use of fresh water	m³	5,67E+05	0*	0*	0*	5,67E+05	0*
Hazardous waste disposed of	kg	4,77E+03	4,04E+03	0*	0*	7,27E+02	0*
Non-hazardous waste disposed of	kg	5,85E+05	8,11E+02	0*	0*	5,84E+05	2,67E+02
Radioactive waste disposed of	kg	3,91E+02	8,52E-01	0*	0*	3,90E+02	0*
Components for reuse	kg	0*	0*	0*	0*	0*	0*
Materials for recycling	kg	0*	0*	0*	0*	0*	0*
Materials for energy recovery	kg	0*	0*	0*	0*	0*	0*
Exported energy	MJ by energy vector	0*	0*	0*	0*	0*	0*
Total use of primary energy during the life cycle	MJ	3,17E+06	3,81E+04	1,97E+03	0*	3,13E+06	6,46E+02

NB : 0* means that this impact either represents less than 0.01% of the total life cycle of the reference flow, or has no impact (in the case where the total impact is zero).



Registration number : SOCO-00048-V01.01-EN	Drafting Rules : PCR-ed3-FR-2015 04 02					
	Supplemented by « PSR-0010-ed1.1-EN-2015 10 16 »					
Verifier accreditation number : VH12	Information and reference documents : www.pep-ecopassport.org					
Date of issue : Novembre 2021	Validity period : 5 years					
Independant verification of the declaration and	data, in compliance with ISO 14025 : 2010					
Internal : 🖂 External : 🗌						
The PCR review was conducted by a panel of exp	PEP					
PEP are compliant with XP C08-100-1 :2016 The elements of the present PEP cannot be comp	B eco PASS					
Document in compliance with ISO 14025: 2010 « I environmental declarations »	PORT.					

This document is intended to be only informative and non-contractual and does not create any right or obligation or commitment for Socomec towards its associates, customers or any other person or entity. All the values indicated in this document may change depending on many factors (use conditions, applications, installations, environment...). The life time mentioned in this document is only indicative and is not intended to be the minimal, maximal or average life time of the product.