

Enclosed switch & safety enclosure

for local and safety breaking applications



your energy
our expertise



socomec
Innovative Power Solutions


Secure your installation

Local breaking enclosures are installed near to a motor or a machine in order to separate them from the power supply. During preventive maintenance or inspection procedures, these enclosures ensure operator safety against accidental start-up of electrical machines.



Enclosed switch & safety enclosures provide the following functions:

- **Isolation:** positive break indication.
- **Breaking for mechanical maintenance:** on-load breaking and lockout.
- **Breaking and emergency stop:** on-load breaking.

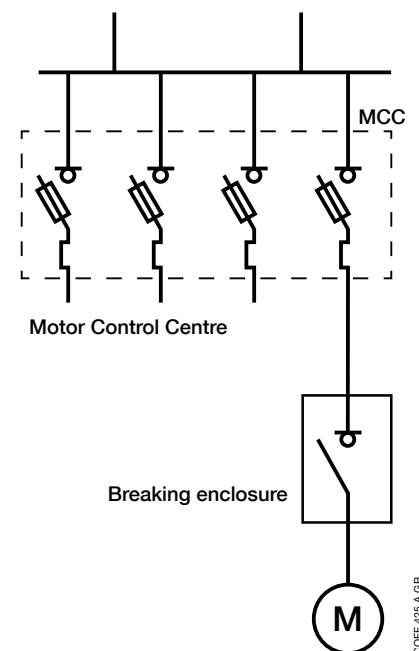

SOCOMEK, your best asset

European manufacturing group

- Created in 1922.
- A workforce of almost 3000.
- Located on all five continents.

A culture of independence

- Family shareholding.
- Control of the decision-making process.
- Respect of human values.

The spirit of innovation

- Almost 10 % of turnover is invested in R&D.

A flexible manufacturing structure

- Competitive production sites.
- Lean Management.
- Lead times, quality and cost guaranteed.

The vision of a specialist

- Expertise in core technologies.
- Product adaptations as per customer requirements.

A focus on service

- Advice, technical assistance and call-out, training.
- Teams located across the globe.

ENERGY
SPECIALIST
SINCE 1922



Local or safety breaking ?

The wide range of local and safety enclosures offered by Socomec precisely meets the regulatory and normative requirements as well as all your operating constraints.

Local breaking enclosures

Located within close proximity of the machine circuit, these enclosures provide very simple operation and are intended for use by qualified personnel, ensuring local breaking, lockout and access-prevention.



Safety enclosures

Maximum safety at a glance

In addition to the functions of local breaking enclosures, safety enclosures provide visible and reliable position indication to ensure maximum safety.



Why have a safety enclosure ?



The user must be able to operate the electrical installation in complete safety.

This requirement is stated in standards HD 60364-4-46 and HD 60364-5-537, IEC 60204.

French legislation on worker protection and the European Low Voltage and Machinery Directives define mandatory isolating functions for mechanical

maintenance, emergency shutdown and emergency stop.

Enclosed switch providing safety functions should therefore be installed on or near machinery. **The visible break and mechanical indicator guarantee optimum safety isolation according to § 537.2 of standard HD 60364 which states:** "The opening gap between the contacts of the device should be visible or clearly and definitely

indicated by markings corresponding to the 'Off' or 'Open' position. Such an indication should only occur when the gap between the opening contacts has been reached on each pole of the device".

Safety functions

Local breaking functions



Triple padlocking

With the switch in its open position, padlocking of the handle with up to 3 padlocks prevents operation thereby providing safe maintenance lockout.



Positive break indication

Handle markings clearly indicate the "open" or "closed" positions of the switch.



Safety breaking functions



Triple padlocking




Positive break indication



Visible contact position indication

Separation of the contacts is directly visible through the door's triplex glass window.

The positioning of the contacts on a sliding bar ensures the effective separation of the contacts.



Flag indicator

Attached directly to the sliding contact bar, this indicator provides visible and reliable contact status at the enclosure door.


It gives foolproof indication of the true position of the contacts.



Double locking

This inhibits the closing of the switch with the enclosure door open while also preventing the opening of the enclosure with the switch in its closed position.

The system is tamper-proof and may, if necessary, be bypassed by authorised personnel with the use of a tool (IEC 61439-1).



Close up on safety enclosures



Specific requirements

Socomec offers customisation and development of products to meet your every requirement. Contact your sales branch for more information.



Operator safety

- Ease of operation **without risk of error** for unqualified operators.
- Provides protection to operators against accidental start-up of machines.
- Maximum security for all types of simple mechanical and electrical maintenance operations.



Quick and easy implementation

- Easy installation: the space available within the enclosure facilitates connection.
- Robust: the product is designed for harsh industrial environments with mechanical risks or non-explosive dust hazards.




Operating continuity

- Proximity breaking: only the targeted machine is switched off, the rest of the installation can continue operating.
- Reduced costs related to production downtime.

Choosing the right type of enclosure

All Socomec safety enclosures are fitted with visible break load break switches with visible contact position indication. They include all electrical and mechanical safety devices: triple padlocking handle, double door lock and flag indicator.

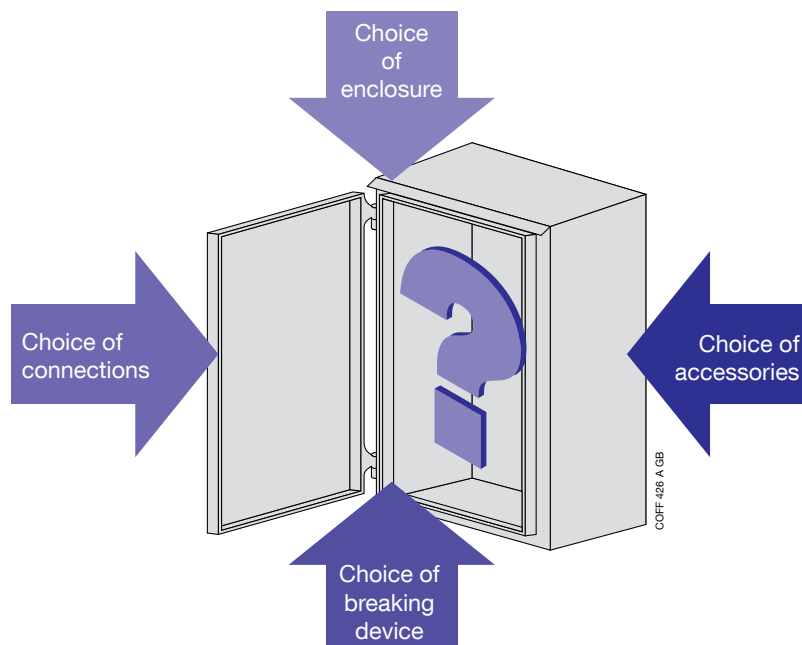

ENCLOSURE

	Sheet metal enclosures	Polyester enclosures	Steel enclosures ⁽¹⁾	ATEX enclosures*
Environment				
Chemical		•	•	
Mechanical hazard	•		•	•
Dust	•		•	
Risk of contamination		•	•	
Corrosive atmosphere		•	•	
Explosive atmosphere				•

CONNECTIONS

TT: Top/top input/output cable entry

TB: Top/bottom input/output cable entry

BB: Bottom/bottom input/output cable entry

BREAKING DEVICE

Ratings from 16 to 1600 A

Number of poles: 3, 4, 6, 8 or X poles for adapted solutions

Operation: front or side

ENCLOSURE ACCESSORIES

Door lock

Pushbuttons

Auxiliary contacts

Ventilation

Measuring devices

(1) Available on request

* Only for safety enclosures

Our solutions

Local breaking enclosures



Load break switches


- Plastic, polyester or sheet metal
- Fitted with SIRCO M or SIRCO from 16 to 1250 A
- 3, 4, 6 and 8 poles
- Top/Bottom or Bottom/Bottom connection
- Front or side operation



On-load fused disconnectors

- Plastic, polyester or sheet metal
- Fitted with Fuserbloc from 16 to 1250 A
- 3, 3+N, 4 poles
- Top/Bottom or Bottom/Bottom connection
- Front or side operation

Safety enclosures

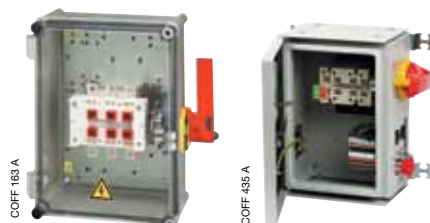

Normal atmospheres

- Polyester or sheet metal enclosures
- Fitted with SIDER or SIRCO MV from 32 to 1600 A
- 3, 4 and 6 poles
- Top/Bottom or Bottom/Bottom connection
- Front or side operation



Explosive atmosphere (ATEX)

Zone 21 and 22 (dust) as per European Directive ATEX 94/9/CE Category 2

- Sheet metal enclosures
- Fitted with SIDER from 50 to 630 A
- 3, 4 and 6 poles
- Top/Bottom or Bottom/Bottom connection
- Side operation

Compliance with standards

- IEC 60364
- IEC 60947-3
- IEC 61439-2
- IEC 60204-1



Supplementary products: Changeover enclosures

Manual supply changeover

- Polyester or sheet metal enclosures
- Fitted with SIRCO M, SIRCO VM1 or SIRCOVER from 16 to 3200 A
- 3 or 4 poles
- Front operation



Remote or automatic supply changeover

- Polycarbonate, polyester or sheet metal enclosures
- Fitted with ATyS M or ATyS from 16 to 3200 A
- 2 or 4 poles
- Many accessories
- Special versions for compliance with high-rise building (HRB) regulations



Socomec worldwide

IN EUROPE

BELGIUM

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +32 2 340 02 30
Fax +32 2 346 28 99
info.be@socomec.com

FRANCE

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +33 1 45 14 63 00
Fax +33 1 48 67 31 12
dcm.ups.fr@socomec.com

GERMANY

Critical Power

Tel. +49 621 71 68 40
Fax +49 621 71 68 444
info.ups.de@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +49 7243 65292 0
Fax +49 7243 65292 13
info.scp.de@socomec.com

ITALY

Critical Power

Tel. +39 02 98 242 942
Fax +39 02 98 240 723
info.ups.it@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +39 02 98 49 821
Fax +39 02 98 24 33 10
info.scp.it@socomec.com

NETHERLANDS

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +31 30 760 0900
Fax +31 30 637 2166
info.nl@socomec.com

POLAND

Critical Power

Tel. +48 22 825 73 60
Fax. +48 22 825 73 70
info.ups.pl@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +48 91 442 64 11
Fax +48 91 442 64 19
info.scp.pl@socomec.com

PORTUGAL

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +351 261 812 599
Fax +351 261 812 570
info.ups.pt@socomec.com

ROMANIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +40 21 319 36 88
Fax +40 21 319 36 89
info.ro@socomec.com

SERBIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +381 11 40 43 246
Fax +381 11 40 43 245
info.rs@socomec.com

SLOVENIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +386 1 5807 860
Fax +386 1 561 11 73
info.si@socomec.com

SPAIN

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +34 93 540 75 75
Fax +34 93 540 75 76
info.es@socomec.com

SWITZERLAND

Critical Power

Tel. +41 44 745 40 80
Fax +41 44 745 40 85
info@socomec.ch

TURKEY

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +90 216 540 71 20-21-22
Fax +90 216 540 71 27
info.tr@socomec.com

UNITED KINGDOM

Critical Power

Tel. +44 1285 863 300
Fax +44 1285 862 304
info.uk@socomec.com

Power Control & Safety / Energy Efficiency

Tel. +44 1462 440 033
Fax +44 1462 431 143
info.uk@socomec.com

IN ASIA PACIFIC

AUSTRALIA

Critical Power / Power Control & Safety

Tel. +61 2 9325 3900
Fax +61 2 9888 9544
info.ups.au@socomec.com

CHINA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +86 21 52 98 95 55
Fax +86 21 62 28 34 68
info.cn@socomec.com

INDIA

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +91 44 39215400
Fax +91 44 39215450 & 51
info.in@socomec.com

SINGAPORE

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +65 6506 7600
Fax +65 64 58 7377
info.sg@socomec.com

THAILAND

Critical Power

Tel. +66 2 941 1644 7
Fax +66 2 941 1650
info.ups.th@socomec.com

IN MIDDLE EAST

UNITED ARAB EMIRATES

Critical Power / Power Control & Safety /
Energy Efficiency

Tel. +971 4 29 98 441
Fax +971 4 29 98 449
info.ae@socomec.com

IN AMERICA

USA, CANADA & MEXICO

Power Control & Safety / Energy Efficiency

Tel. +1 617 245 0447
Fax +1 617 245 0437
info.us@socomec.com

OTHER COUNTRIES

NORTH AFRICA

Algeria / Morocco / Tunisia
info.naf@socomec.com

AFRICA

Other countries

info.africa@socomec.com

SOUTH EUROPE

Cyprus / Greece / Israel / Malta
info.se@socomec.com

SOUTH AMERICA

Tel. +34 93 540 75 75
info.es@socomec.com

MORE DETAILS

www.socomec.com/worldwide

HEAD OFFICE

SOCOMECS GROUP

SAS SOCOMECS capital 10 686 000 €
R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse
F-67235 Benfeld Cedex - FRANCE
Tel. +33 3 88 57 41 41
Fax +33 3 88 74 08 00
info.scp.isd@socomec.com

YOUR DISTRIBUTOR / PARTNER

www.socomec.com

your energy
our expertise



ENERGY
SPECIALIST
SINCE 1922

socomec
Innovative Power Solutions